M35




F28




M35 + F28 = MF63




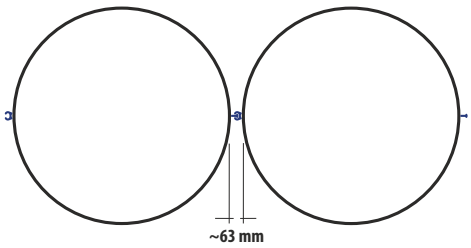





## Schlossprofil MF63

| Anwendungen | |
|---|---|
| Rohrspundwände, H-Spundwände | |

| Eigenschaften | |
|---|---|
| Stahlgüte: | S355J2 |
| Standardlängen: | 8 m, 11,8 m |
| Stahldicke: | 12 mm |
| Gewicht M35: | 4,76 kg/m |
| Gewicht F28: | 10,7 kg/m |
| Max. Zugkraft: | 2.552 kN/m FEM |

SteelWall-Profile entsprechen i.d.R. den europäischen Normen und werden in zertifizierten Unternehmen der stahlverarbeitenden Industrie hergestellt. Alle Zahlenangaben sind Zirka-Werte und können abweichen. Stabverdrehungen sind bis zu 2 mm je Meter möglich. Toleranz der Stahldicke ±1 mm. Stahldicke kann sich an Profilenden um bis zu 2 mm reduzieren. Längentoleranz bis zu ±200 mm. Gradangaben beziehen sich auf die Schlossprofilachsen. Technische Änderungen sind vorbehalten. Wir verweisen auf die DIN EN 12063. Bitte prüfen Sie die Spundwandschlossleisten mit Musterabschnitten der gewünschten Schlossprofile auf Gängigkeit.

## Connector MF63

| Applications | |
|---|---|
| Pipe pile walls, H pile walls | |

| Properties | |
|---|---|
| Steel grade: | S355J2 |
| Standard lengths: | 8 m, 11.8 m |
| Steel thickness: | 12 mm |
| Weight M35: | 4.76 kg/m |
| Weight F28: | 10.7 kg/m |
| Max. tensile strength: | 2,552 kN/m FEM |

SteelWall connectors generally comply with the European standards and are manufactured by certified steel processing companies. All figures are approximate and may vary. Bar twists are possible up to 2 mm per meter. Tolerance of steel thickness ±1 mm. Steel thickness can be reduced by up to 2 mm at connector ends. Length tolerance up to ±200 mm. Degree details refer to the connector bar axes. We reserve the right to make technical changes. We refer to DIN EN 12063. Please check the sheet pile interlocks with a physical sample section of the desired connector for compatibility.

**Headquarters Germany**
SteelWall ISH GmbH
Tölzer Str. 32, 82031 Grünwald, Germany
Phone: +49-89-74 120 122, Fax: +49-89-74 120 128
E-mail: info@steelwall.eu, **steelwall.eu**

**Sales line North America**
South East Asia, Japan, Oceania
SteelWall US, Humphrey Chang
8:30 am to 4:30 pm (US Central Time)
Toll free 1(888) 309 2250, Fax: 1(888) 743 7712
E-mail: chang@steelwallus.com, **steelwallus.com**

Copyrighted property of
Steelwall ISH GmbH.
All rights reserved.

23-Nov-2025